


ALcode P etykietowanie palet



Etykieciarka palet ALcode P

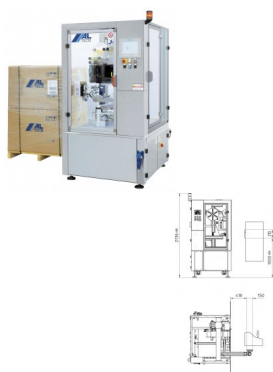


The ALcode P pallet labeller prints and applies A5 format labels to two consecutive pallet sides (normally front and side, but also to three sides on request). Performance: up to 120 pallets/h (180 with labelling on one side only).

Ocena: Nie ma jeszcze oceny
[Zapytaj o produkt](#)

Opis

The ergonomic external structure and control panel integrated in the safety cabinet are key features of ALcode P, which is able to apply labels:

- **to two** (front + side) **or**
- **three sides** (front + side + rear) of the pallets. The applicator can also label pallets with slightly different dimensions, shapes and stopping positions in real time.



For applying **two labels** (front + side) **to pallets of constant dimensions**, ALTECH has come up with a reliable applicator which offers a more economical solution. The application system with rotary movement of the applicator arm, and the fact it is motor driven, are real innovations.

Labelling of the various sides **only requires one pallet stop**.

A **laser scanner** checks that the barcodes are legible and that both labels have been correctly applied, performing a second attempt in the event of an error before generating an alarm to stop the line when necessary.

Printing Unit

ALcode P uses the **SATO 8460Se printer unit**, which guarantees high-quality performance even in “difficult” industrial environments.

- Print resolution: 8, 12 or 24 dots/mm.
- Print speed: 400 mm/s
- Max. label width: 104 – 152 mm.

The modular assembly also allows the use of alternative printing units (Zebra, Datamax, Valentin etc.).

Filmy z pracy aplikatora:

<https://youtu.be/4FnU2m8GPxU>

https://youtu.be/y67tgofMJ_c